

LED-1260MPS



HCI by
LED

France Compact 60W Class 2 LED Power Supply

SPECIFICATIONS

Size

7.12" long x 1.80" wide x 1.49" tall,
including baseplate

Ambient operating temperature

-40°C to 60°C (-40°F to 140°F)

Input voltage capacity

120 - 277 VAC

Output

12 VDC, 5 Amps, 60 Watts,
no minimum load requirements

Lead length

8" input and output

Conduit fittings

3/8" input and output

Damp or Dry location use

Use indoors or outdoors in letters, raceways
or FRANCE LED cans

Warranty

5 years

A Fusion of Performance, Quality, Compact Size and Value

• Compact Size

7.12" long x 1.80" wide x 1.49" tall, including baseplate.

• Tru-Power™ Rated

Designed to operate reliably at full rated output power in maximum
rated ambient temperature—no need to de-rate unless maximum
ambient temperature is exceeded

• Overload Protection Shut Down

Unit blinks LEDs when significantly overloaded.

• High Electrical Efficiency

Cool operation in small package


For more information, contact your
distributor or email us at sales@sfeg.com

LED-1260MPS 60 Watt Tru-Power™ LED Power Supply



Electrical Specifications

At Input Voltage	120 VAC 277 VAC
Input Frequency	50/60 Hz
Max Input Current	1.10 Amp 0.60 Amp
Output Voltage	12 VDC
Max Output Current	5.0 Amps
Max Output Power	60 Watts

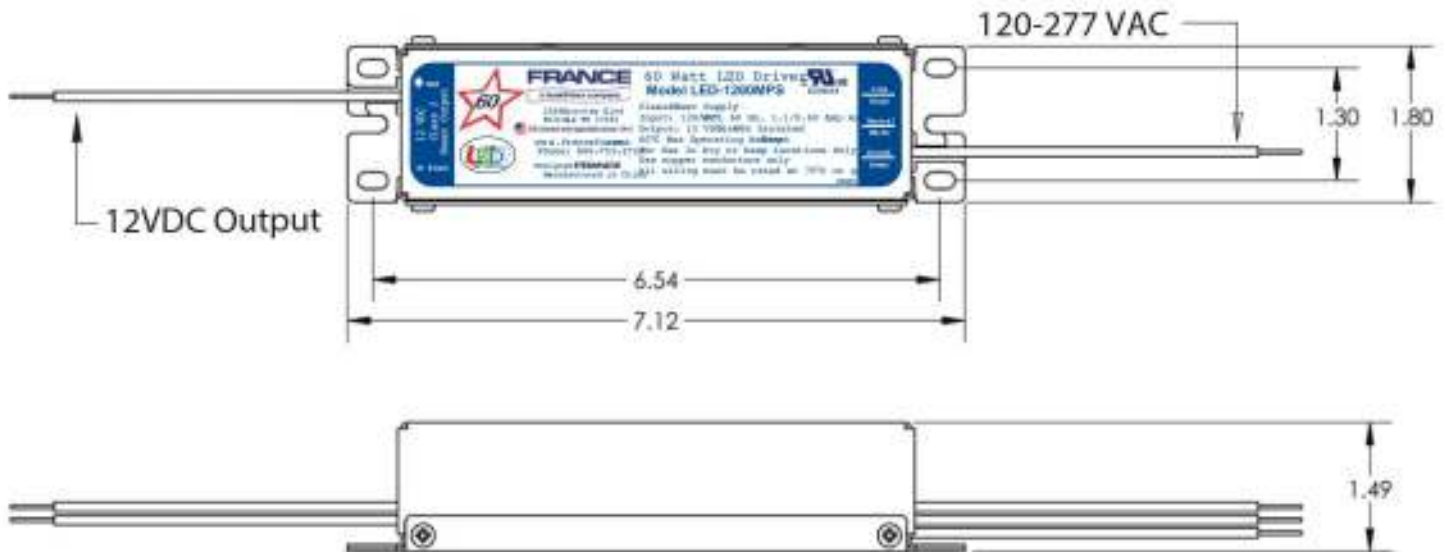

Check out our other LED Products



UL US All components mounted within Fast-Pak™ kits are UL Sign Accessories

LED-1260EPS

60W Reliant® Tru-Power™ LED Power Supply

- Use in Wet, Damp or Dry locations
- Self protection feature limits output current when an LED string overload is attempted
- Short circuit protection automatically resets when LED string short circuit condition is removed

LED Fast-Pak™ Kits Complete pre-assembled, prewired kits



LED Fast-Pak™

- 14.85" long x 5.30" wide x 3.21" tall
- Features LED-1260EPS power supply and 20A toggle switch
- Wet-listed enclosure (horizontal mount only)



mini LED Fast-Pak™

- 9.71" long x 4.73" wide x 2.99" tall
- Features LED-1260MPS power supply and 20A toggle switch
- Unique wet-listed enclosure, mount horizontally or vertically



Double mini LED Fast-Pak™

- 10.49" long x 8.78" wide x 2.99" tall
- Features two LED-1260MPS power supplies and 20A toggle switch
- Unique wet-listed enclosure, mount horizontally or vertically

For more information, contact your distributor or email us at sales@sfeg.com

800.909.4875

www.sfeg.com/France-power-solutions

2268 Fairview Blvd., Fairview, TN 37062